

TECHNICAL DATA SHEET



DIC PSAs
web page




1G51A3 E Color & Comfort

Light shielding and reflection adhesive tape

DAITAC® #8612EDX-W-30A-2

■ Construction

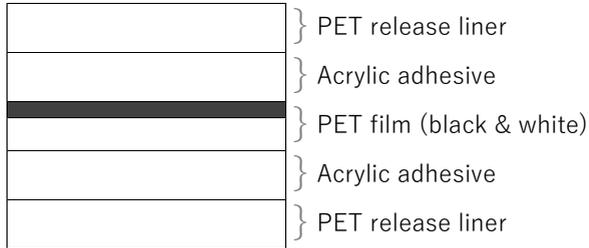

※Outside of a roll

■ Characteristics

- ✓ Good repulsion resistance.
- ✓ Prevent waving of prism sheet.
- ✓ Excellent light shielding
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

■ Applications

- ✓ For bonding LCD module
- ✓ Great for bonding to areas that requires light shielding.

■ Properties

Test item	Condition	Substrate	Unit	#8612EDX-W-30A-2
Thickness	Except release liner	-	μ m	30
180 deg. peel strength	Conform to JIS Z0237	PC	N/20mm	8
		SUS (hairline)	N/20mm	7.5
Transmittance	Conform to JIS Z7361	-	%	< 0.1

■ **Size** 980mm in max width 50m in length