

TECHNICAL DATA SHEET



DIC PSAs
web page




1P66A2 E Color & Comfort

Polyester Film Based Double Coated Adhesive Tape

DAITAC® #8616V

■ Construction

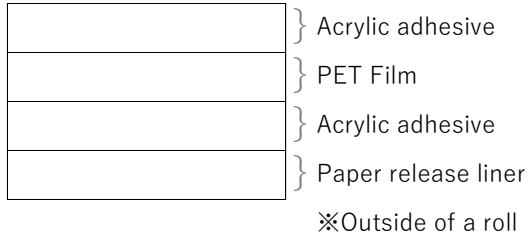

■ Characteristics

- ✓ Strong double coated adhesive tape with PET film carrier.
- ✓ High tensile strength and dimensional stability due to PET film carrier
- ✓ Excellent adhesion to various plastic materials and metals.
- ✓ Good adhesion to various materials
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

■ Applications

- ✓ For bonding parts made of polyurethane foam, film

■ Properties

Test item	Condition	Substrate	Unit	#8616V
Thickness	Except release liner	-	mm	0.07
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/20mm	13
		PC/ABS	N/20mm	12
Static shear	70°C, 0.5kg	SUS (hairline)	hr	24 <
Tensile strength	MD	-	N/20mm	71
	TD	-	N/20mm	88

■ **Remarks** UL969 certified [File No.MH-12834]

■ **Size** 1,000mm in max width 50m in length