

TECHNICAL DATA SHEET



DIC PSAs
web page




1Y10A2 E Color & Comfort

PET Carrier Double Coated Adhesive Tape

DAITAC® #8625ER-140

■ Construction

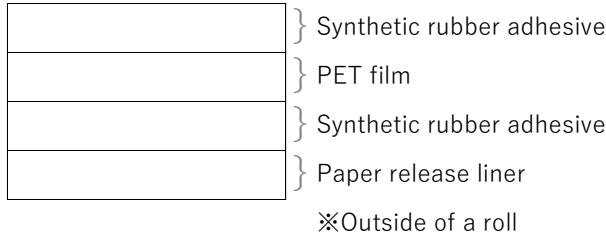

■ Characteristics

- ✓ · Excellent adhesion and durability.
- ✓ · Excellent adhesion to LSE substrates (polyolefin plastic, rubber and thermoplastic elastomers.)
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

■ Applications

- ✓ · Used in application for bonding rubber grips and rubber padding.

■ Properties

Test item	Condition	Substrate	Unit	#8625ER-140
Thickness	Except release liner	-	mm	0.14
180 deg. peel strength	Conform to JIS Z0237	SUS(hairline)	N/20mm	29
		ABS	N/20mm	26
		PP	N/20mm	26
		CR Rubber	N/20mm	8
		EPDM Rubber	N/20mm	10
Static shear	40°C, 0.5kg	SUS(hairline)	hr	24 <

- **Remarks** Adhesion to rubber materials may decrease with age due to the migration of chemicals within the rubber. Make sure to check chemical migration in advance before using this product.

- **Size** 1,060mm in max width 50m in length