

TECHNICAL DATA SHEET



DIC PSAs
web page




1K12A1 E Color & Comfort

Polyester Film Based Double Coated Adhesive Tape

DAITAC® #8625S

■ Construction

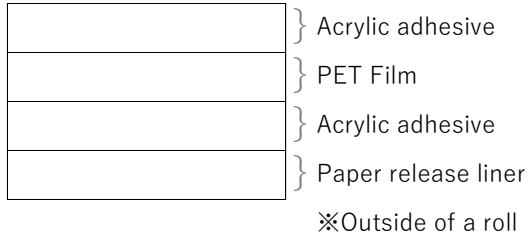

■ Characteristics

- ✓ Adhesive surface is very smooth which give the tape good initial adhesion (wettability)
- ✓ For adding dimensional stability to soft material
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

■ Applications

- ✓ Suitable for spacer application in peripheral glass panels.
- ✓ For adhesion to foam substrate
- ✓ For bonding cushion material of LCD panel

■ Properties

Test item	Condition	Substrate	Unit	#8625S
Thickness	Except release liner	-	mm	0.08
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/20mm	12
Static shear	40°C, 1kg	-	mm/hr	< 2
Ball tack	Conform to JIS Z0237	-	No.	6

■ Size 1,060mm in max width 50m in length