

TECHNICAL DATA SHEET



DIC PSAs
web page




1F63A4 E Color & Comfort

Polyester Film Based Double Coated Adhesive Tape

DAITAC® #8625UJ-2

Construction

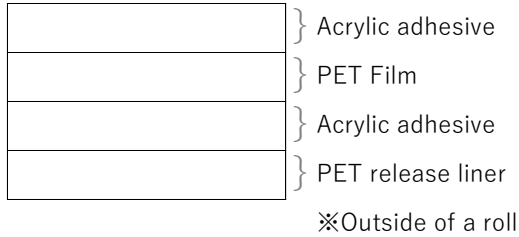

Characteristics

- ✓ Excellent adhesion
- ✓ Dust-proof anti-static release film liner.
- ✓ Minimal paper powder dust caused during processing.
- ✓ Smoothness and good dimensional stability
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

Applications

- ✓ For bonding LCD module
- ✓ For bonding mobile electronic equipment parts

Properties

Test item	Condition	Substrate	Unit	#8625UJ-2
Thickness	Except release liner	-	μm	100
180 deg. peel strength	Conform to JIS Z0237	SUS (hairline)	N/20mm	20
		PC	N/20mm	19
		ABS	N/20mm	19
		AC	N/20mm	19
		PET	N/20mm	20
Static shear	40°C, 1kg	SUS(hairline)	mm/hr	< 1

Remarks

Adhesive layer on this single liner type may look hazy due to micro air bubbles.
Product might not be suitable for applications that require high optical transparency.

Size 1,000mm in max width 50m in length

DIC Corp.

Composite Solutions BU

https://www.dic-global.com/en/products/adhesive_tapes/

Please note that the data provided in this catalog (the "Catalog") is offered for informational purposes only, and serves as an example of previously measured values and not guaranteed values. DIC Corporation ("DIC") does not and shall not guarantee suitability and compatibility of the Products and the materials that the buyer will incorporate the Products with. Please note that prior to any use of the products stated in the Catalog (the "Products"), it is the buyer's responsibility to confirm the suitability and compatibility of the Products and the materials that the buyer will incorporate the Products with. DIC may modify the specifications of the Products stated in the Catalog at any time and at DIC's sole discretion prior to any use of the products. DIC shall not be liable for any infringement on any third parties' intellectual property rights resulting from the Products' existence, sale, use, combination with any materials, or any other applications or the Products thereof. DIC is the owner of the copyright associated with this Catalog. Copying and/or reprinting this Catalog without obtaining prior permission in writing from DIC is strictly prohibited.