

TECHNICAL DATA SHEET



DIC PSAs
web page




1N97A5 E Color & Comfort

Polyester Film Based Double Coated Adhesive Tape

DAITAC® #8650CP-200

■ Construction

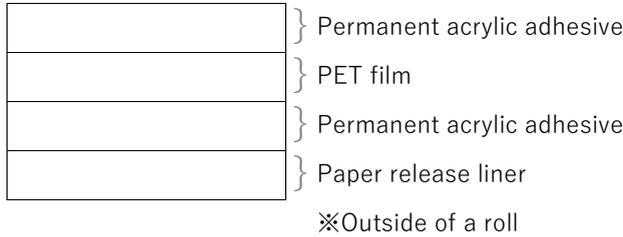

■ Characteristics

- ✓ Excellent adhesion
- ✓ Excellent push strength.
- ✓ Good repulsion resistance.
- ✓ High tensile strength and dimensional stability due to PET film carrier
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

■ Applications

- ✓ For attaching a display panel for a mobile phone to the main body
- ✓ For bonding cushion material of LCD panel
- ✓ For bonding parts where repulsion force is applied

■ Properties

Test item	Condition	Substrate	Unit	#8650CP-200
Thickness	Except release liner	-	mm	0.200
180 deg. peel strength	Conform to JIS Z0237	SUS(hairline)	N/20mm	18.0
Static shear	40°C, 1kg, 1hr/4cm ² (Conforms to JIS Z0237)	SUS(hairline)	mm/hr	2.0 >
Push Out	DIC method	ABS	N/4cm ²	140

■ **Size** 1,060mm in max width 50m in length