

TECHNICAL DATA SHEET



DIC PSAs
web page




1N02A1 E Color & Comfort

Polyester Film Based Double Coated Adhesive Tape

DAITAC® #8675S

Construction

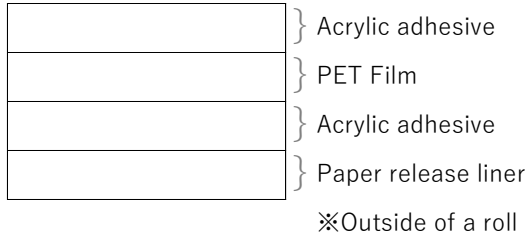

Characteristics

- ✓ Adhesive surface is very smooth which give the tape good initial adhesion (wettability)
- ✓ For adding dimensional stability to soft material
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

Applications

- ✓ Suitable for spacer application in peripheral glass panels.
- ✓ For adhesion to foam substrate
- ✓ For bonding cushion material of LCD panel

Properties

| Test item | Condition | Substrate | Unit | #8675S |
|------------------------|----------------------|----------------|--------|--------|
| Thickness | Except release liner | - | mm | 0.125 |
| 180 deg. peel strength | 23°C, 1hr | SUS (hairline) | N/20mm | 12 |
| Static shear | 40°C, 1kg | - | mm/hr | < 2 |
| Ball tack | Conform to JIS Z0237 | - | No. | 6 |

Size 1,000mm in max width 50m in length