

TECHNICAL DATA SHEET



DIC PSAs
web page




0B92A2 E Color & Comfort

Removable Double Coated Adhesive Tape

DAITAC® #8800DR

Construction

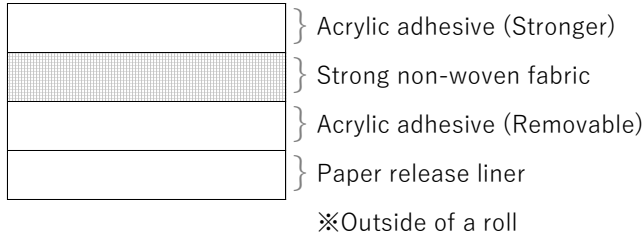

Characteristics

- ✓ Differential adhesives (strong and moderate), double coated adhesive tape
- ✓ Excellent reworkability and disassembly due to the use of tough non-woven fabric.
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

Applications

- ✓ For bonding recyclable material in one side
- ✓ For bonding large recyclable materials.

Properties

Test item	Condition	Substrate	Unit	#8800DR	
				Permanent adhesive side	Removable adhesive side
Thickness	Except release liner	-	mm	0.145	
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/20mm	15.2	10
		ABS	N/20mm	17	10
	60°C90%RH, 7days	SUS (hairline)	N/20mm	23	14
		ABS	N/20mm	21	13
Reworkability	60°C90%RH, 7days	SUS (hairline)	-	-	Excellent
		ABS	-	-	Excellent
		HIPS	-	-	Excellent
		PC/ABS	-	-	Excellent

Size 1,000mm in max width 50m in length