




TECHNICAL DATA SHEET

Toluene and xylene free double coated adhesive tape

DAITAC® #8810ECO

■ Construction

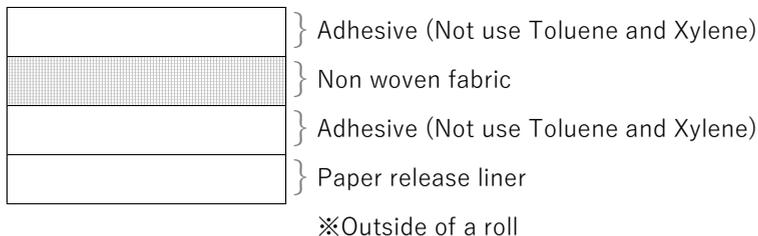

■ Characteristics

- ✓ Does not use substances(Toluene etc.) listed in the "Indoor Concentration Guidelines for Chemical Substances" formulated by the Ministry of Health, Labour and Welfare of Japan.
- ✓ Excellent adhesion to various foam, metal and plastic materials
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

■ Applications

- ✓ For bonding various automotive interior materials like cushion.
- ✓ Great for bonding construction material. Can be used for temporary bonding applications
- ✓ For bonding various electrical equipment, mobile device

■ Properties

Test item	Condition	Substrate	Unit	#8810ECO
Thickness	Except release liner	-	mm	0.14
180 deg. peel strength	Conform to JIS Z0237	SUS(hairline)	N/20mm	16.0
		ABS	N/20mm	15.0
		PP	N/20mm	12.0
Static shear	40°C, 1kg	SUS(hairline)	mm/hr	< 2
Ball tack	Conform to JIS Z0237	-	No.	8

■ **Size** 1,060mm in max width 50m in length