

# TECHNICAL DATA SHEET



DIC PSAs  
web page




0E42A7 E Color & Comfort

Toluene and xylene free and Removability Double Coated Adhesive Tape

## DAITAC® #8810TDR

### Construction

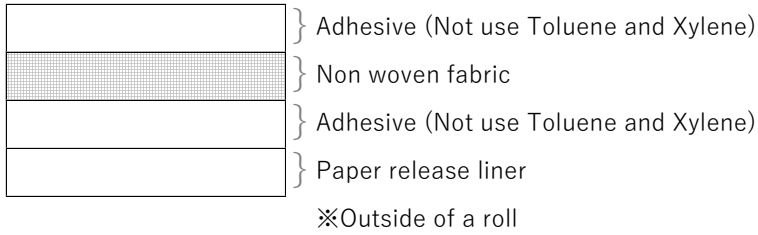

### Characteristics

- ✓ Does not use substances(Toluene etc.) listed in the "Indoor Concentration Guidelines for Chemical Substances" formulated by the Ministry of Health, Labour and Welfare of Japan.
- ✓ Can be peeled off cleanly without the use of heat when recycling plastic and metal parts.
- ✓ Excellent reworkability and disassembly due to the use of tough non-woven fabric.
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

### Applications

- ✓ For bonding recyclable electrical equipment

### Properties

Test item	Condition	Substrate	Unit	#8810TDR
Thickness	Except release liner	-	mm	0.14
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/20mm	15
		AL	N/20mm	15
		ABS	N/20mm	16
		HIPS	N/20mm	15
		PC	N/20mm	16.5
		PC/ABS	N/20mm	16
		Glass	N/20mm	15
Static shear	40°C, 1kg	SUS (hairline)	mm/hr	< 1
Dynamic Shear Strength	23°C, 24hr	SUS (hairline)	N/4cm <sup>2</sup>	500
Static 90 deg. peel strength	23°C, 0.3kg/10mm	ABS	mm/hr	6
Repulsion resistance (polyurethan foam)	10mm×10mm, 180 deg. , 70°C	PU foam	-	Excellent
Reworkability	60°C90%RH, 7days	Galvanized steel	-	Excellent
		PC/ABS	-	Excellent
		HIPS	-	Excellent

**Remarks** UL969 certified [File No.MH-12834]

**Size** 1,000mm in max width 50m in length

**DIC Corp.**

Composite Solutions BU

[https://www.dic-global.com/en/products/adhesive\\_tapes/](https://www.dic-global.com/en/products/adhesive_tapes/)

Please note that the data provided in this catalog (the "Catalog") is offered for informational purposes only, and serves as an example of previously measured values and not guaranteed values. DIC Corporation ("DIC") does not and shall not guarantee suitability and compatibility of the Products and the materials that the buyer will incorporate the Products with. Please note that prior to any use of the products stated in the Catalog (the "Products"), it is the buyer's responsibility to confirm the suitability and compatibility of the Products and the materials that the buyer will incorporate the Products with. DIC may modify the specifications of the Products stated in the Catalog at any time and at DIC's sole discretion prior to any use of the products. DIC shall not be liable for any infringement on any third parties' intellectual property rights resulting from the Products' existence, sale, use, combination with any materials, or any other applications or the Products thereof. DIC is the owner of the copyright associated with this Catalog. Copying and/or reprinting this Catalog without obtaining prior permission in writing from DIC is strictly prohibited.