

TECHNICAL DATA SHEET



DIC PSAs
web page




0R20A4 E Color & Comfort

Excellent Adhesion non-woven Based Double Coated Adhesive Tape

DAITAC® #8840ER

Construction

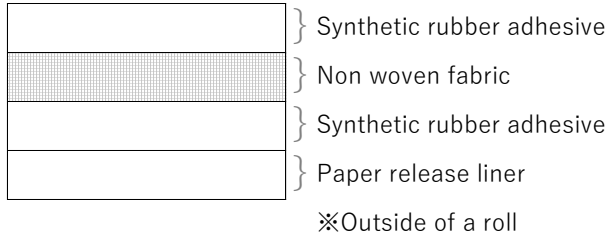

Characteristics

- ✓ Excellent adhesion and durability.
- ✓ Excellent adhesion to LSE substrates (polyolefin plastic, rubber and thermoplastic elastomers.)
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

Applications

- ✓ Used in application for bonding rubber grips and rubber padding.

Properties

Test item	Condition	Substrate	Unit	#8840ER
Thickness	Except release liner	-	mm	0.135
180 deg. peel strength	Conform to JIS Z0237	SUS (hairline)	N/20mm	29.4
		AL	N/20mm	30
		ABS	N/20mm	27
		PMMA	N/20mm	25
		PC	N/20mm	27
		PS	N/20mm	28
		PP	N/20mm	27
		CR Rubber	N/20mm	8
		EPDM Rubber	N/20mm	10
Static shear	40°C, 0.5kg	SUS (hairline)	hr	24 <

- **Remarks** Adhesion to rubber materials may decrease with age due to the migration of chemicals within the rubber. Make sure to check chemical migration in advance before using this product.

- **Size** 1,060mm in max width 50m in length