

# TECHNICAL DATA SHEET



DIC PSAs  
web page




4F22A4 E Color & Comfort

Copper foil adhesive tape

## DAITAC® E-1100LC

### ■ Construction

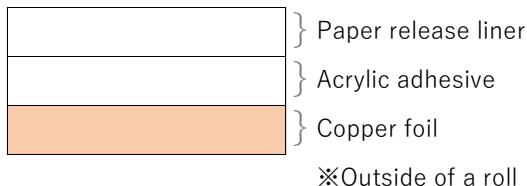

### ■ Characteristics

- ✓ 50% thinner compared to E-2100LC
- ✓ Excellent electrical conductivity in thickness direction.
- ✓ Excellent adhesion
- ✓ Product does not use the 6 restrictive substances of the RoHS Directive.

### ■ Applications

- ✓ For EMI shielding of electronic equipment.

### ■ Properties

Test item	Condition	Substrate	Unit	E-1100LC
Thickness	Except release liner	-	μm	40
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/25mm	16.7
		ABS	N/25mm	16.7
		PET	N/25mm	16.7
		PC	N/25mm	16.7
Static shear	70°C, 0.5kg	SUS (hairline)	mm/hr	< 2

■ **Size** 1,000mm in max width 50m in length

**DIC Corp.**

Composite Solutions BU

[https://www.dic-global.com/en/products/adhesive\\_tapes/](https://www.dic-global.com/en/products/adhesive_tapes/)

Please note that the data provided in this catalog (the "Catalog") is offered for informational purposes only, and serves as an example of previously measured values and not guaranteed values. DIC Corporation ("DIC") does not and shall not guarantee suitability and compatibility of the Products and the materials that the buyer will incorporate the Products with. Please note that prior to any use of the products stated in the Catalog (the "Products"), it is the buyer's responsibility to confirm the suitability and compatibility of the Products and the materials that the buyer will incorporate the Products with. DIC may modify the specifications of the Products stated in the Catalog at any time and at DIC's sole discretion prior to any use of the products. DIC shall not be liable for any infringement on any third parties' intellectual property rights resulting from the Products' existence, sale, use, combination with any materials, or any other applications or the Products thereof. DIC is the owner of the copyright associated with this Catalog. Copying and/or reprinting this Catalog without obtaining prior permission in writing from DIC is strictly prohibited.