

TECHNICAL DATA SHEET



DIC PSAs
web page




4F23A4 E Color & Comfort

Electrical conductive copper foil tape for EMI shielding

DAITAC® E-2100LC

Construction

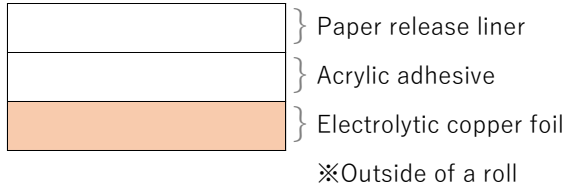

Characteristics

- ✓ Excellent EMI shielding
- ✓ Excellent adhesion, stability.
- ✓ Good die-cutting ability
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

Applications

- ✓ For EMI shielding of electronic equipment.

Properties

Test item	Condition	Substrate	Unit	E-2100LC
Thickness	Except release liner	-	μm	70
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/25mm	17.6
		ABS	N/25mm	17.1
		PS	N/25mm	17.4
		PC	N/25mm	17.9
Static shear	70°C, 0.5kg	SUS (hairline)	mm/hr	< 2

Remarks UL510FR certified [File No.E-167390]

Size 1,000mm in max width 50m in length