

# TECHNICAL DATA SHEET



DIC PSAs  
web page




4F26A5 E Color & Comfort

Electrical conductive copper foil tape for EMI shielding

## DAITAC® E-2300ND-2

### ■ Construction

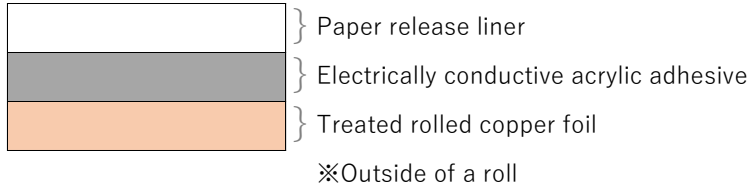

### ■ Characteristics

- ✓ Excellent EMI shielding
- ✓ Good thermal conductivity
- ✓ Good electrical conductivity in thickness direction.
- ✓ Good flexibility due to soft carrier
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

### ■ Applications

- ✓ For EMI shielding of electronic equipment.
- ✓ For electric shielding of connector, substrate

### ■ Properties

Test item	Condition	Substrate	Unit	E-2300ND-2
Thickness	Except release liner	-	$\mu$ m	65
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/25mm	12
		Glass	N/25mm	10
Static shear	40°C, 1kg	SUS (hairline)	mm/hr	< 2
Electrical resistance(Pressure method)	-	Copper foil	$\Omega$ /6.25cm <sup>2</sup>	< 0.01
Electrical resistance(Attachment method)	50°C95%RH, 7days	Copper foil	$\Omega$ /6.25cm <sup>2</sup>	0.02

■ **Remarks** UL510FR certified [File No.E-167390]

■ **Size** 500mm in max width 50m in length