

TECHNICAL DATA SHEET



DIC PSAs
web page




6E15A4 E Color & Comfort

Polyimide Film Based Adhesive Tape

DAITAC® HRT30

■ Construction

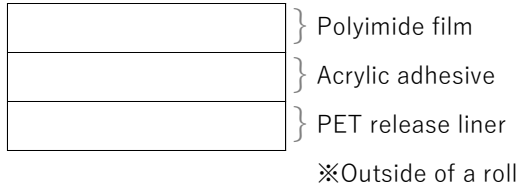

■ Characteristics

- ✓ Excellent heat resistance
- ✓ Good electrical insulating properties.
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

■ Applications

- ✓ For high temperature application
- ✓ Insulating for electrical and electronics devices.

■ Properties

Test item	Condition	Substrate	Unit	HRT30
Thickness	Except release liner	-	mm	0.03
180 deg. peel strength	Conform to JIS Z0237	SUS (hairline)	N/25mm	3
Static shear	150°C, 0.5kg	SUS (hairline)	hr	>24

■ Size 980mm in max width 50m in length