

# TECHNICAL DATA SHEET



DIC PSAs  
web page




1H42A5 E Color & Comfort

Light shielding and reflection adhesive tape

## DAITAC® RTS60-S

### ■ Construction

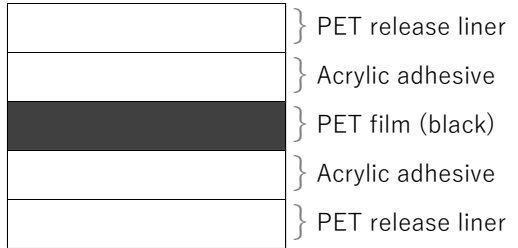

※Outside of a roll

### ■ Characteristics

- ✓ Excellent adhesion
- ✓ Good repulsion resistance.
- ✓ Excellent light shielding
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

### ■ Applications

- ✓ For bonding LCD module
- ✓ Great for bonding to areas that requires light shielding.

### ■ Properties

Test item	Condition	Substrate	Unit	RTS60-S
Thickness	Except release liner	-	$\mu$ m	60
180 deg. peel strength	Conform to JIS Z0237	SUS (hairline)	N/20mm	13.5
		PC	N/20mm	13.5
Transmittance	Conform to JIS Z7361	-	%	< 0.1

■ Size            1,000mm in max width    50m in length