

TECHNICAL DATA SHEET



DIC PSAs
web page




1H44A2 E Color & Comfort

Light shielding and reflection adhesive tape

DAITAC® RTS85-S

■ Construction

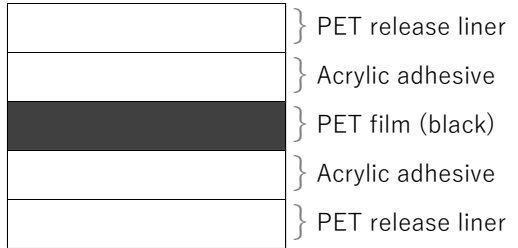

※Outside of a roll

■ Characteristics

- ✓ Excellent adhesion
- ✓ Good repulsion resistance.
- ✓ Excellent light shielding
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

■ Applications

- ✓ For bonding LCD module
- ✓ Great for bonding to areas that requires light shielding.

■ Properties

Test item	Condition	Substrate	Unit	RTS85-S
Thickness	Except release liner	-	μ m	85
180 deg. peel strength	Conform to JIS Z0237	SUS (hairline)	N/20mm	16
		PC	N/20mm	16
Transmittance	Conform to JIS Z7361	-	%	< 0.1

■ **Size** 1,000mm in max width 50m in length