

TECHNICAL DATA SHEET



DIC PSAs
web page




1U38A4 E Color & Comfort

Foam Based Double Coated Adhesive Tape

DAITAC® SCW900

Construction

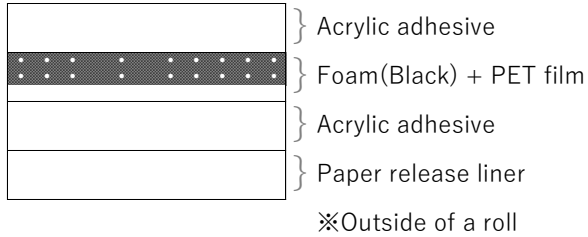

Characteristics

- ✓ Good conformability
- ✓ Good lamination workability
- ✓ Excellent removability of PET film side
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

Applications

- ✓ Used in application such as bonding items in TV or mobile device

Properties

Test item	Condition	Substrate	Unit	SCW900	
				PET side	Foam Side
Thickness	Except release liner	-	mm	0.9	
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/20mm	11	7.5*

Remarks

* The value is due to foam base break.

Please consider that the adhesion of the foam side to substrate is the same as that of the PET side.

Size

980mm in max width 30m in length