

# TECHNICAL DATA SHEET



DIC PSAs  
web page




0A62A2 E Color & Comfort

Non-carrier optically clear adhesive tape

## DAITAC® ZB7011W-2

### ■ Construction

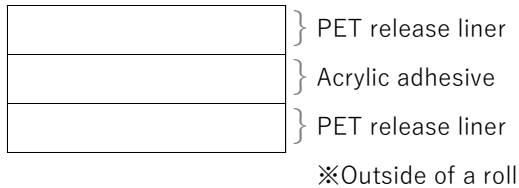

### ■ Characteristics

- ✓ Excellent transparency.
- ✓ Excellent Anti-generating of bubbles.
- ✓ Product does not use the 6 restrictive substances of the RoHS Directive.

### ■ Applications

- ✓ For touch panel module

### ■ Properties

Test item	Condition	Substrate	Unit	ZB7011W-2
Thickness	Except release liner	-	μ m	25
180 deg. peel strength	23°C, 1hr	Glass	N/25mm	11
Transmittance	Conform to JIS Z7361	Glass/Glass	%	91
Haze	Conform to JIS K7136	Glass/Glass	%	0.4

■ **Size** 980mm in max width 100-150m in length

DIC Corp.

Composite Solutions BU

[https://www.dic-global.com/en/products/adhesive\\_tapes/](https://www.dic-global.com/en/products/adhesive_tapes/)

Please note that the data provided in this catalog (the "Catalog") is offered for informational purposes only, and serves as an example of previously measured values and not guaranteed values. DIC Corporation ("DIC") does not and shall not guarantee suitability and compatibility of the Products and the materials that the buyer will incorporate the Products with. Please note that prior to any use of the products stated in the Catalog (the "Products"), it is the buyer's responsibility to confirm the suitability and compatibility of the Products and the materials that the buyer will incorporate the Products with. DIC may modify the specifications of the Products stated in the Catalog at any time and at DIC's sole discretion prior to any use of the products. DIC shall not be liable for any infringement on any third parties' intellectual property rights resulting from the Products' existence, sale, use, combination with any materials, or any other applications or the Products thereof. DIC is the owner of the copyright associated with this Catalog. Copying and/or reprinting this Catalog without obtaining prior permission in writing from DIC is strictly prohibited.