

TECHNICAL DATA SHEET



DIC PSAs
web page




0A53A3 E Color & Comfort

Non-carrier optically clear adhesive tape

DAITAC® ZB7012W

■ Construction

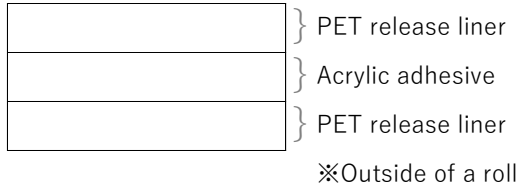

■ Characteristics

- ✓ Excellent transparency.
- ✓ Excellent Anti-generating of bubbles.
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

■ Applications

- ✓ For touch panel module

■ Properties

Test item	Condition	Substrate	Unit	ZB7012W
Thickness	Except release liner	-	μ m	50
180 deg. peel strength	23°C, 1hr	Glass	N/25mm	11
Transmittance	Conform to JIS Z7361	Glass/Glass	%	91
Haze	Conform to JIS K7136	Glass/Glass	%	0.4

■ **Size** 980mm in max width 100-150m in length