
TECHNICAL INFORMATION



Removability Double Coated Adhesive Tape

DAITAC #8100CH-2

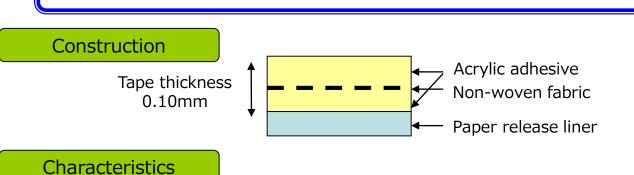


- \cdot Good adhesion performance equivalent to "#8800CH" with abundant track records.
- Excellent removability from various plastic and metal.
- Dimensional stable backing provides excellent stability at tape application.

Application

• For many kind of parts used in electrical and electronics industry.

Properties

		Unit	#8100CH-2
Peel strength at 180° angle	SUS		12
	ABS	N/20mm	12
	РР		11
Holding power(40℃,1kg)		mm/h	1 >
Ball tack		No.	8
Adhesive strength at 90° angle and constant stress 23℃, 0.3kg/10mm	SUS	mm/h	9
Removability After 7 days at60℃ • 90%RH	SUS	_	Good
	ABS	_	Good



最大幅:1000mm、標準長さ:50m Max width:1000mm、Standard length:50m

DIC Corporation

Composite Material Div.

http://www.dic-global.com/en/

Items mentioned in this information are for customers 'reference and limited to certain examples although they are based on the most reliable data obtained by our company. It is hoped that customers make the best use of these products after careful examination. Concerning to use and processing the products on this documents, it is not guaranteed a industrial ownerships of a third party. All recipes and processes should be modified, if necessary to conform with particular application.