


# TECHNICAL INFORMATION

1M75A2E

Electrically conductive non-woven fabric base double coated adhesive tape



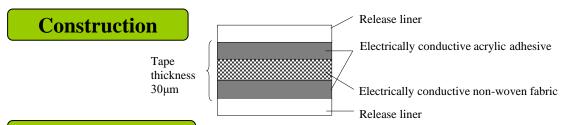

### Characteristic


- •Flexible non-woven fabric base makes bending better.
- Excellent electrical conductivity in XYZ-Axis.
- •Good adhesive strength.

# **Application**

- For grounding static electricity.
- For EMI shielding of electronic equipment.

## **Property**

	Units	#8520FDW-30
Tape thickness	μm	30
Adhesion (SUS)	N/20mm	7.0
Electrical Conductivity :Pressure Method	$\Omega/6.25$ cm²	0.02
Electrical Conductivity :Attached Method	$\Omega/6.25$ cm <sup>2</sup>	0.04

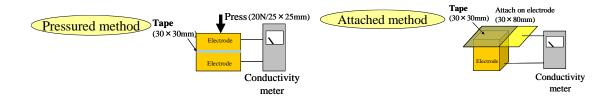

#### DIC Corporation Composite Material Product div. http://www.dic-global.com/en/

Items mentioned in this information are for customers' reference and limited to certain examples although they are based on the most reliable data obtained by our company. It is hoped that customers make the best use of these products after careful examination. Concerning to use and processing the products on this documents, it is not guaranteed a industrial ownerships of a third party. All recipes and processes should be modified, if necessary to conform with particular application.