
TECHNICAL INFORMATION



Excellent Adhesion PET Film Based Double Coated Adhesive Tape

DAITAC #8616ER-80

Construction

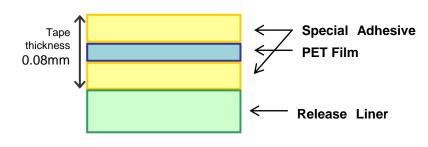

Characteristics

Excellent adhesion and repulsion resistance.

Excellent adhesion to polyolefin plastic, rubber materials, thermoplastic elastomers and so on.

*Caution: There is a possibility that adhesion of this tape decrease by migrated substances from rubber. Please evaluate practical use appropriately to confirm this adhesive tape suits your usage.

Applications

For bonding various rubber parts for cushion, grip and so on, used in the electric equipment.

Properties

		Unit	#8616ER-80
Tape thickness		[mm]	0.08
Peel strength	SUS (hairline)	[N/20mm]	18.0
	ABS		21.5
	РР		13.0
	CR Rubber		7.0
	EPDM Rubber		8.0
Holding power	40℃ 500g/4cm²	[hour]	24<

Size

Maximum width is 1060mm. Standard length is 50m.

DIC Corporation Composite Material Product div.

http://www.dic-global.com/en/

Items mentioned in this information are for customers' reference and limited to certain examples although they are based on the most reliable data obtained by our company. It is hoped that customers make the best use of these products after careful examination. Concerning to use and processing the products on this documents, it is not guaranteed a industrial ownerships of a third party. All recipes and processes should be modified, if necessary to conform with particular application.