


Excellent Adhesive Strength and Removability Double Coated Adhesive Tape

DAITAC #8800CH(W)

UL969 certified [File No.MH-12834]

CONSTRUCTION

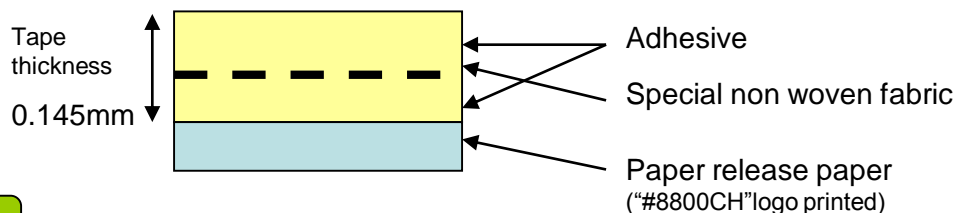

CHARACTERISTIC

- Excellent adhesion to various plastic material and metal
- Excellent removability from various plastic and metal
- Dimensional stable backing provides excellent stability at tape application
- Excellent repulsion resistance and good heat resistance
- The six hazardous materials restricted by the RoHS directive are not compounded

APPLICATION

- For many kind of parts used in electrical and electronics industry
- For mounting various recyclable materials in the industrial applications

PROPERTY

		Unit	# 8 8 0 0 C H (W)
Peel strength at 180° angle	SUS	N/20mm	1 5 . 2
	ABS		1 5 . 2
	HIPS		1 5 . 2
	PP		1 3 . 0
	PET		1 5 . 0
Holding power (40°C, 1kg)		mm/h	1 >
Ball tack		No.	8
Adhesive strength at 90° angle and constant stress	SUS	mm/h	9
	23°C, 0.3kg/10mm ABS		9
Removability After 7 days at 60 °C · 90%RH	SUS		Good
	ABS		Good
	HIPS		Good

STANDARD SIZE

#8800CH:1000mm, #8800CHW:1060mm in max width / 50m in length