




1K52A4E

PET Carrier Double Coated Adhesive Tape



Construction

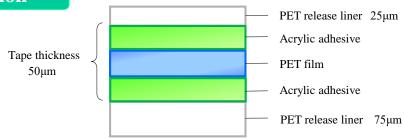

Characteristic

- Excellent adhesive strength.
- Excellent repulsion resistance.
- Excellent holding strength.
- Excellent insulation.

Application

• For bonding FPC.

Property

	Units	FRT50
Tape thickness	μm	50
Adhesion (SUS) (PI) (PC) (ABS) (glass)	N/20mm	11 11 12 13 11
Surface resistance	Ω	10^{12}

Size

1000mm in max width / 50m in length

DIC Corporation Composite Material Product div. http://www.dic-global.com/en/

Items mentioned in this information are for customers' reference and limited to certain examples although they are based on the most reliable data obtained by our company. It is hoped that customers make the best use of these products after careful examination. Concerning to use and processing the products on this documents, it is not guaranteed a industrial ownerships of a third party. All recipes and processes should be modified, if necessary to conform with particular application.